




PRECISION GUIDE PILLARS

GUIDE PILLAR THREAD SIZES		RECOMMENDED SEATING TORQUE
NOM. DIA. "D"	THREAD SIZE	Kg-M
24-32	M6	0,90
40-50-63-80	M10	4,40

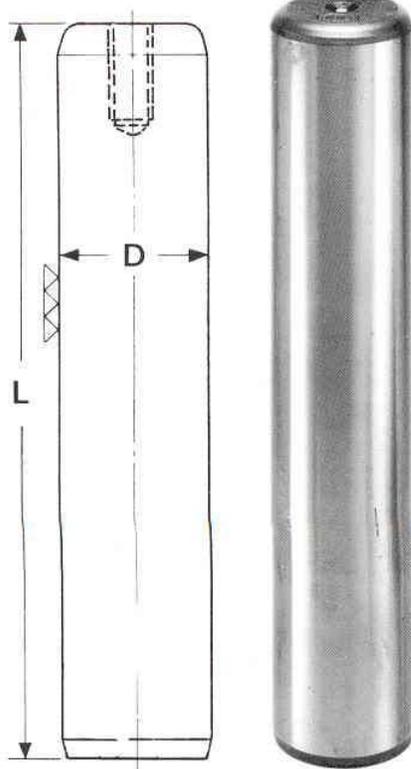

D	18	19	24	25
L	Cat. No.	Cat. No.	Cat. No.	Cat. No.
100	5-1810-82	5-1910-82	5-2410-82	5-2510-82
110	5-1811-82	5-1911-82	5-2411-82	5-2511-82
120	5-1812-82	5-1912-82	5-2412-82	5-2512-82
130	5-1813-82	5-1913-82	5-2413-82	5-2513-82
140	5-1814-82	5-1914-82	5-2414-82	5-2514-82
150	5-1815-82	5-1915-82	5-2415-82	5-2515-82
160	5-1816-82	5-1916-82	5-2416-82	5-2516-82
170	5-1817-82	5-1917-82	5-2417-82	5-2517-82
180	5-1818-82	5-1918-82	5-2418-82	5-2518-82
190	5-1819-82	5-1919-82	5-2419-82	5-2519-82
200	5-1820-82	5-1920-82	5-2420-82	5-2520-82
220			5-2422-82	5-2522-82
240			5-2424-82	5-2524-82
260			5-2426-82	5-2526-82
280			5-2428-82	5-2528-82
D	30	32	40	42
L	Cat. No.	Cat. No.	Cat. No.	Cat. No.
130	5-3013-82	5-3213-82	5-4013-82	5-4213-82
140	5-3014-82	5-3214-82	5-4014-82	5-4214-82
150	5-3015-82	5-3215-82	5-4015-82	5-4215-82
160	5-3016-82	5-3216-82	5-4016-82	5-4216-82
170	5-3017-82	5-3217-82	5-4017-82	5-4217-82
180	5-3018-82	5-3218-82	5-4018-82	5-4218-82
190	5-3019-82	5-3219-82	5-4019-82	5-4219-82
200	5-3020-82	5-3220-82	5-4020-82	5-4220-82
220	5-3022-82	5-3222-82	5-4022-82	5-4222-82
240	5-3024-82	5-3224-82	5-4024-82	5-4224-82
260	5-3026-82	5-3226-82	5-4026-82	5-4226-82
280	5-3028-82	5-3228-82	5-4028-82	5-4228-82
320	5-3032-82	5-3232-82	5-4032-82	5-4232-82
360			5-4036-82	5-4236-82
D	50	52	63	80
L	Cat. No.	Cat. No.	Cat. No.	Cat. No.
160	5-5016-82	5-5216-82		
180	5-5018-82	5-5218-82		
200	5-5020-82	5-5220-82	5-6320-82	
220	5-5022-82	5-5222-82	5-6322-82	
240	5-5024-82	5-5224-82	5-6324-82	5-8024-82
260	5-5026-82	5-5226-82	5-6326-82	5-8026-82
280	5-5028-82	5-5228-82	5-6328-82	5-8028-82
320	5-5032-82	5-5232-82	5-6332-82	5-8032-82
330	5-5033-82	5-5233-82		
360	5-5036-82	5-5236-82	5-6336-82	5-8036-82
400	5-5040-82	5-5240-82	5-6340-82	5-8040-82
450	5-5045-82	5-5245-82	5-6345-82	5-8045-82
500			5-6350-82	5-8050-82

In accordance with DIN 9825
 Induction hardened to 60-64 Rc.
 Suitable for use with all brushes.

ORDERING
 State catalogue number
 from chart above